English

LA SOCIÉTÉ FRANÇAISE DE L'ÉNERGIE VERTE
SFEV
CONSTRUIRE UN AVENIR DURABLE

RECOM® TECHNOLOGIES

PRODUCT CATALOGUE



Leading European Manufacturer

TOP PV BRAND & TOP PV SUPPLIER

FRANCE - USA - MENA - VIETNAM - HUNGARY - GREECE - NORWAY - ROMANIA - IRELAND

EUPD RESEARCH TOP BRAND PV MODULES FRANCE 2018
EUPD RESEARCH TOP BRAND PV MODULES USA 2021
EUPD RESEARCH TOP BRAND PV MODULES MENA 2021
EUPD RESEARCH TOP BRAND PV MODULES VIETNAM 2021
EUPD RESEARCH TOP BRAND PV MODULES HUNGARY 2021
EUPD RESEARCH TOP BRAND PV MODULES GREECE 2022
Joint Forces for Solar Global TOP PV SUPPLIER NORWAY MODULES powered by EUPD Research 2023
Joint Forces for Solar Global TOP PV SUPPLIER ROMANIA MODULES powered by EUPD Research 2024
Joint Forces for Solar Global TOP PV SUPPLIER IRELAND MODULES powered by EUPD Research 2024

RECOM TECHNOLOGIES

RENEWABLE ENERGY COMPANY

"Our profession, by default, puts on us the responsibility and obligation to be part of meeting the challenge of halting the global warming and degradation of the environment. To meet this challenge, our ultimate goal must be to enable countries, corporations, companies, institutions, households and individuals achieve energy independence. Simply put, enable them to own the power. The solar, and only the solar, has that potential."



Hamlet Tunyan, CEO

TABLE OF CONTENTS

About RECOM	4-5
RECOM in Numbers	6
RECOM Advantages at a Glance	7
Top PV Brand & Supplier - Global Partners	8
PV Modules	9-21
Inverters, Storage & Accessories	22-25
EV Chargers	26-27
Repower the World	28
Solar Associations	29
Project References	30-31

What Drives Us

At RECOM we think differently and we are committed to the mission before us to lessen humanity's dependence on fossil fuel, overcome global imbalances and halt the degradation of our environment.

Renewable sources, ubiquitous and infinitely available, can supply energy evenly to people and communities across continents and regions, regardless of their wealth and social standing, generate growth and help avoid economic and military conflicts around the world-and all this in a clean and sustainable environment.

At RECOM we believe in such a future and we work constantly to make solar energy available everywhere and for everyone. Our aim is to solarize the world energy supply and make clean energy the source for all electricity, mobility and smart infrastructure of the future.

Our Values

Doing things right is one of our most important values at RECOM. We are committed to providing high-quality services and products to meet the interests and satisfaction of our customers. We provide value for money and deliver the best customer service and experience.

As we aim to achieve our dual goals of exceptional quality and fair price, we are always mindful of our commitment to act with the highest standard of integrity in all of our business decisions and actions. Internally, we are ethnically diverse, gender-equal one team, accountable and respectful among ourselves and towards others. Externally, the respect for human rights, labor laws, fair competition and environmental considerations are the guiding principles in our choices for outsourcing, procurement and end users.

Who we are

RECOM Technologies is a leading European renewable energy company with notable global presence in the solar industry. RECOM is a manufacturer of cells, PV modules, inverters, hybrid storage systems, batteries, and electric vehicle (EV) chargers, and is an innovative company that integrates R&D, manufacturing, and distribution. RECOM is a leading PV module manufacturer in Europe with above 3,2 GW annual production capacity and with sales of solar modules in more than 110 countries.

From the early years of its operation the company expanded its manufacturing capabilities by acquiring a cell production facility in Padua, Italy, in 2015 and a module manufacturing plant in Lannion, France, in 2017. In 2024 RECOM is streamlining its operations and transferring its module production from France to Italy.

Along with our internal R&D team, we invest in, and work with leading global research institutions and manufacturers to innovate, develop, share and commercialize the latest technological advances in solar module manufacturing. Our primary R&D partner in the area of solar panels is a leading French research center, the National Institute for Solar Energy (CEA/INES). We also work with other research centers, universities and manufacturing companies as our portfolio expands. We pioneer in solar power and energy storage solutions, as it comes to skid mounted panel-inverter solutions for residential, commercial, and utility scale energy applications.

RECOM Manufacturing Plant

Recom-Italia serves as the cell and module production division of Recom Technologies. Recently, the module production operations have transitioned from Lannion, France to Recom's cell manufacturing facility in Padua, Italy.


This strategic move aims to vertically integrate and consolidate cell and module manufacturing, enhancing operational efficiency. In 2017, Recom acquired SILLIA VL in Lannion, France, inheriting a legacy of quality manufacturing dating back to 1965 when the facility operated under French telecommunications giant SAGEM–SAFRAN, and later under BOSCH since 2014.

Since the acquisition, Recom has made significant investments to modernize and expand the facility, improving cost efficiency, increasing output, and reducing carbon footprint. The skilled labor force at SILLIA has been retained, bringing decades of experience, production ethics, and adherence to the highest quality standards.

Recom-Italia originally joined Recom as a solar cell manufacturing facility in Padua, Italy in 2015. With the amalgamation of Recom-Sillia's manufacturing expertise, a subsequent technological upgrade, and the integration of cell manufacturing, Recom-Italia now stands as Recom Technologies' primary European manufacturing center.





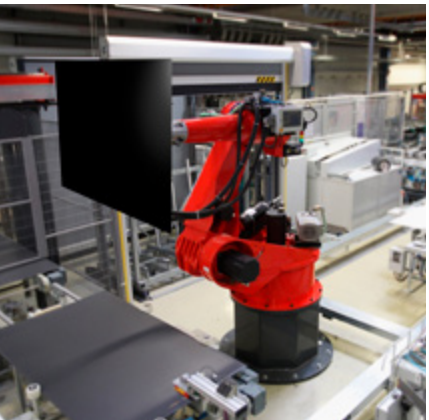







RECOM in numbers

>3,2 GW

Production Capacity

2007

Year that the company was founded

10bn kWh

Clean and affordable energy replacing 2m tons of CO_2 emission

~350

Experienced and qualified industry personnel across many continents

>110

Countries RECOM PV modules installed

>$1b

Revenues



RECOM advantages at a glance

- Module Efficiency up to 24.5%
- Low Temperature Coefficient -0.24% / °C
- No LID & PID
- >91.25% Output After 30 Years
- 30 Years Product & Output Warranty
- Wide Variety
- Reduced Risk of Micro Cracks
- All Products are Tested and Certified
- Superior Aesthetics
- 0% Frond Grid Shading Loss
- Low-carbon Footprint
- Fast, Low Cost and Timely Delivery From Our European Factories or European Warehouses to Your Door



Leading European PV Module Manufacturer

TOP PV BRAND & TOP PV SUPPLIER

FRANCE - USA - MENA - VIETNAM - HUNGARY - GREECE - NORWAY - ROMANIA - IRELAND



GLOBAL PARTNERS

Marubeni · ENGIE · sunnova · Rosendin Electric · nrg · NextEra Energy · CCC · Rexel · enel · TotalEnergies · EDF · CS Energy · Saudi Aramco · RES · Conti

Reinvent Technology
PV Modules

Solar technology holds immense potential as a crucial component of the renewable energy landscape, paving the way for a sustainable future.




Black Tiger SERIES

UNLEASH THE POWER OF THE BLACK TIGER:

EXTREME EFFICIENCY,
FLAWLESS BLACK AESTHETICS

BACKCONTACT TECHNOLOGY

From 430Wp & up to 660Wp

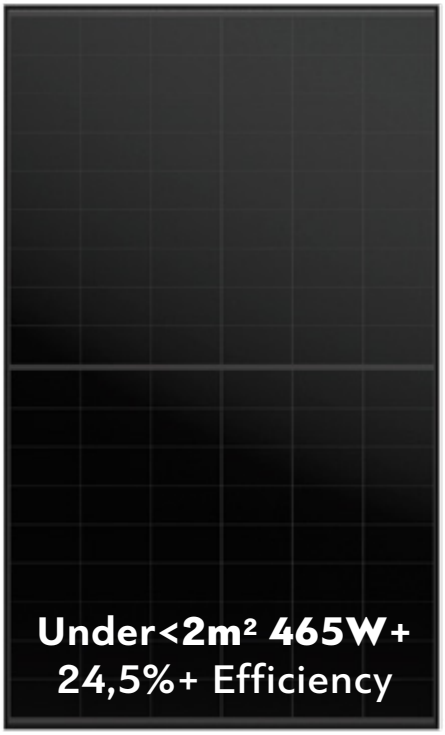



25 YEARS PRODUCT WARRANTY

UP TO 30 YEARS TRANSFERABLE LINEAR POWER OUTPUT WARRANTY

1

World's 1st Efficiency

ADVANTAGES OF BLACK TIGER BACKCONTACT MODULES

Black Tiger modules provide numerous benefits to customers seeking a high-quality product with exceptional performance and aesthetic, captivating design.

The "Black Tiger" module utilizes N-Type cell technology in conjunction with a rear connection method known as BackContact. As a result, there is 0% front grid shadow loss, which increases the PV module yield. Due to reduced shading on the front of the cell, the module maximizes total cell area realizing higher efficiency and resulting in a fast return on investment.

Guaranteed mechanical resistance to severe weather conditions

Wp Positive tolerance

EL 100% electro-luminescence tested

KEY BENEFITS

- Light Induced Degradation Close to Zero
- 25 Years Product Warranty
- 0% Front Grid Shading Loss
- Low Pmax Temperature Coefficient
- Low LCOE
- Higher Yield in Hot Climate

PERFORMANCE AT HIGH TEMPERATURES


HIGHER OUTPUT IN HOT CLIMATE	+2,40 %	Specific yield (kWh/kWp) due to low temperature coefficient
MORE EFFICIENT SPACE UTILIZATION	- 10,00 %	Space required for 1MWp of Black Tiger modules
HIGHER GENERATION PER UNITY	+ 2,47 %	PV plant yield/sq.m in hot climate
LOWER POWER LOSS	+ 4,40 %	PV plant yield in 30 years of using

HIGHEST EFFICIENCY IN THE WORLD

Black Tiger Series has “World’s 1st” module efficiency, as it reaches up to 24.5%.


BENEFITS OF BACKCONTACT TECHNOLOGY

- No grid lines, pure black with cutting-edge all back contact cells
- +13.4% full life-cycle power generation than the traditional P-type modules
- >5% BOS reduction, significant saving on cables and mounting systems
- 100% silver-free, reliable supply than the other N-type modules

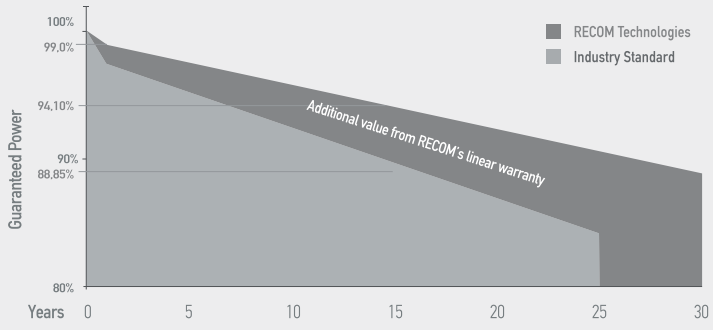

First Year Output	≥ 99.0%	2-30 Year Decline	≤ 0.35%	30 Year Output	≥ 88,85%

LEADING MODULE EFFICIENCY 24.5%

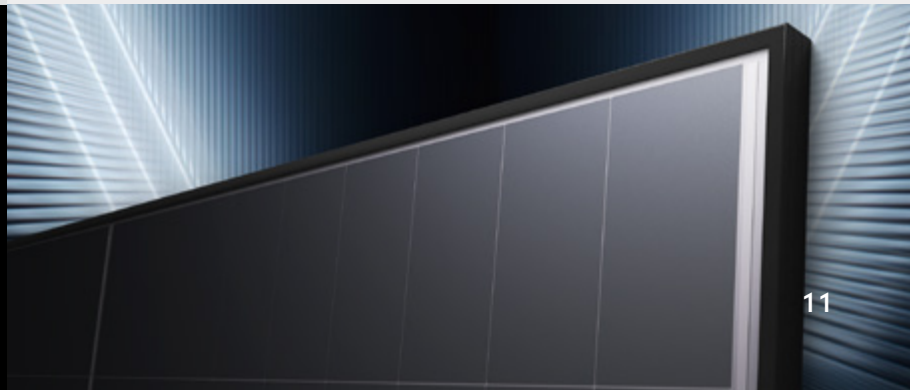

Lion SERIES

THE TECHNOLOGY
OF THE FUTURE TODAY

HETEROJUNCTION TECHNOLOGY

From 380Wp & up to 750Wp



Up to 24,1% Module Efficiency

ADVANTAGES OF LION HETEROJUNCTION MODULES

HIGH EFFICIENCY
In STC condition, due to the Tandem technology, HJT modules have higher efficiency at least by 1% compared to other technologies. HJT is active on both UV and infrared wavelengths and has a higher light output.

NO LID&PID
HJT has no power loss against 1% first year (LID) and up to 5% after with PID syndrome in standard mono perc module.

Heterojunction (HJT) photovoltaic module is a ground breaking technology. HJT technology guarantees high performance and low degradation of the PV module, substantially improving results and yield over time.

Lion series reaches over 750Wp power, 7% higher compared to standard PV modules.

Low temperature coefficient

High energy yield

Low degradation



Lion SERIES

KEY BENEFITS

- Up to 24,1% Module Efficiency
- ≥ 91,25% Output After 30 Years
- Low Temperature Coefficient -0,24% /°C
- High Bifaciality
- No LID & PID
- 10% - 35% Power Generation Gain

PERFORMANCE AT HIGH TEMPERATURES

HIGHER OUTPUT IN HOT CLIMATE	+ 1,8 %	Specific yield (kWh/kWp) due to low temperature coefficient
MORE EFFICIENT SPACE UTILIZATION	- 6,3 %	Space required for 1MWp of LION modules
HIGHER GENERATION PER UNIT AREA	+ 5,9 %	PV plant yield /sq.m. in hot climate
HIGHER BIFACIAL FACTOR	+ 4,0 %	Project installed with sand soil albedo
LOWER POWER LOSS	+ 5,6 %	PV plant yield in 30 years of using

LOW DEGRADATION


Lion series modules use HJT cell technology, which have lower degradation than Mono PERC panels.

More stable and sustainable electricity production.

Power yield ≥ 95% after 15 years, ≥ 92,5% after 25 years and ≥ 91,25% after 30 years.

HIGHER PERFORMANCE

Gain up to 20% more energy yield, in low-light conditions, in the morning and evening hours and during cloudy skies.

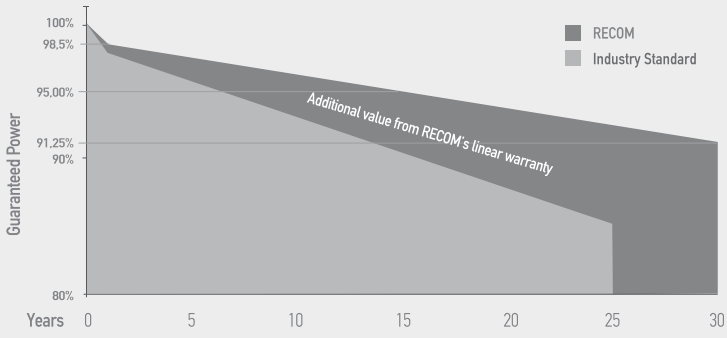

First Year Output	≥ 98.5%	2-30 Year Decline	≤ 0.25%	30 Year Output	≥ 91.25%

Great appearance

BLENDS PERFECTLY WITH THE ROOFTOP



Scenario Analysis 1

100000m^2 (250*400m)Fixed area

GROUND POWER PLANT

BOS cost analysis
Fixed adjustable mounting system , longitudinal double row 2P,30% sand reflectivity ,
Extremely low Environmental Temperature 9℃

Cell size/Layout		166mm /120pcs		210mm /132pcs	
Module		Lion Series HJT Half-cut	L Brand Perc Half-cut	Lion Series HJT Half-cut	H Brand Perc Half-cut
Power (W)		375	375	700	670
conversion efficiency (%)		19.98%	20.59%	22.53%	21.57%
Installed capacity (MW)		11.09	10.71	12.15	11.22
Power generation	30-year power generation with the same area	589247	501568	643358	547095
	30-year cumulative increase rate	17.48%	benchmark	17.60%	benchmark
BOS cost	Land cost	-3.53%	benchmark	-8.35%	benchmark
	Combiner box & cable costs	-4.78%	benchmark	-4.54%	benchmark
	Variable BOS cost	-0.42%	benchmark	-4.39%	benchmark
LCOE	LCOE	0.1957	0.2110	0.1872	0.1954
	LCOE calculation	-7.82%	benchmark	-4.4%	benchmark

- Improved energy yield for 30 years: **+17.6%**
- Land cost saving: **-8.35%**
- Combiner box & cable costs: **-4.78%**
- Variable BOS cost: **-4.39%**
- LCOE reduce: **-7.82%**

10000m^2(100*100m) Fixed area
Industrial and commercial roof

Scenario Analysis 2

ROOF POWER PLANT

BOS cost analysis
Fixed adjustable roof mounting system , longitudinal double row 2P,70% sand reflectivity
Extremely low Environmental Temperature -5℃


Module	Lion series HJT Half-cut	L Brand Perc Half-cut	Lion series HJT shingled all black	H Brand Perc Half-cut
Cell size/Layout	166mm/120pcs	166mm/120pcs	158.75mm/132pcs	210mm/120pcs
Power (W)	385	375	415	405
Efficiency (%)	20.51%	20.59%	21.17%	21.07%
Installed capacity (MW)	1.11	0.77	0.79	0.83
30-year power generation with the same area	43567	36791	31057	27504
30-year cumulative increase rate	18.42%	benchmark	12.92%	benchmark
Roof cost	-1.48%	benchmark	-0.89%	benchmark
LCOE	0.2629	0.2880	0.3793	0.3964
LCOE calculation	-9.58%	benchmark	-4.51%	benchmark


- Improved energy yield for 30 years: **+18.42%**
- Land cost saving: **-1.89%**
- LCOE reduce: **-9.58%**

LOWEST TEMPERATURE COEFFICIENT

Lion series modules with HJT cell Technology, perform at high environmental temperature.

- Amorphous silicon (a-Si) has less power loss due to the temperature and reduce the thermal powercoefficient of the HJT (compared to single Monocrystalline composition).
- At the operating temperature of 50 ° C, Lion series has better Efficiency than standard modules

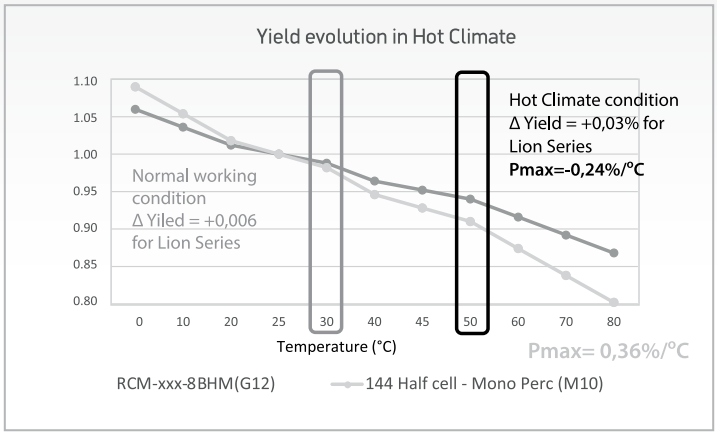

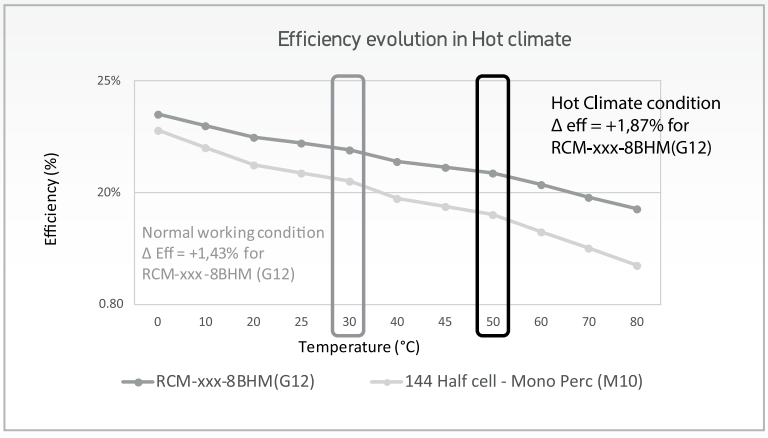


Lynx SERIES

SUPERIOR RETURNS,
POWER & LIABILITY

N-TYPE PV MODULES WITH TOPCon TECHNOLOGY

From 410Wp & up to 720Wp

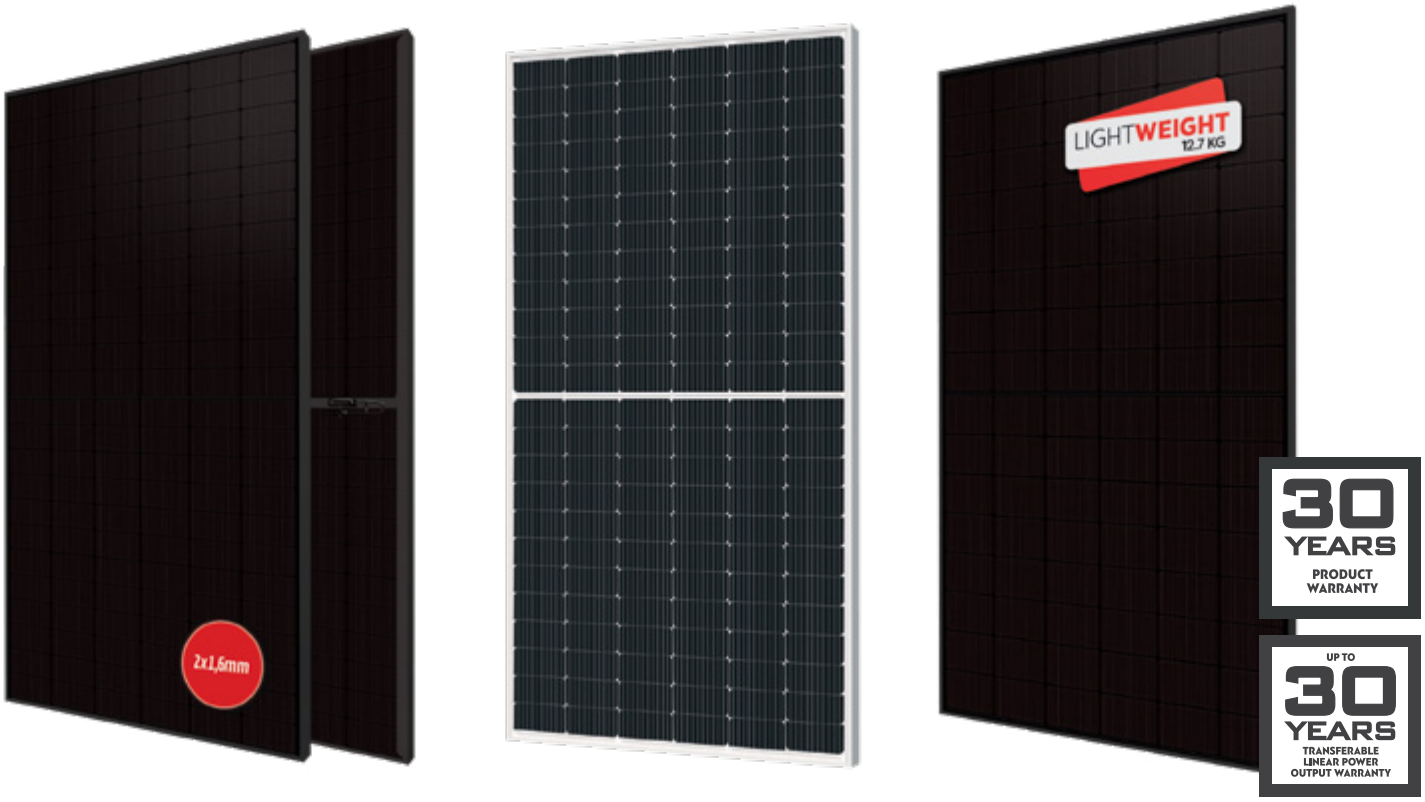

Pmax

Low Pmax

ADVANTAGES OF LYNX BIFACIAL MODULES

HIGH EFFICIENCY (23,18%)
The N-TOPCon module has a strong power generation capacity per watt, which is reflected in its strong advantage in the cost of electricity and a strong premium capacity.

No LID (< 0.2%) & no risk of LeTID
N-type module is a fundamental solution to the risk of LID because there is no BO pairs for its phosphorus-doped substrate. After LeTID test, N-TOPCon modules show no power loss.

Bifaciality
Lynx bifacial series have been widely applied in a large number of PV systems in the world with more than 10% power gain from the bifacial design comparing to monofacial power plant (Bifaciality factor up to 80%).

Wp Positive tolerance

Guaranteed mechanical resistance to severe weather conditions

EL 100% electro-luminescence tested

KEY BENEFITS

- Light Induced Degradation Close to Zero
- 30 Years Product Warranty
- Higher Yield per Surface Area
- Low Pmax Temperature Coefficient
- Higher Light Conversion
- Anti Glare Glass

PERFORMANCE AT HIGH TEMPERATURES

HIGHER OUTPUT IN HOT CLIMATE **+1,28 %** Specific yield (kWh/kWp) due to low temperature coefficient


MORE EFFICIENT SPACE UTILIZATION **- 5,01 %** Space required for 1MWp of Lynx modules

HIGHER GENERATION PER UNIT AREA **+ 2,01 %** PV plant yield/sq.m in hot climate

N-type solar cells (TOPCon) are seen as the technology of the future.

N-type (TopCon) technology guarantees high performance and low degradation of the PV module, substantially improving results and yield over time.

“Lynx” Series module is the ideal solution for end users who want a Quality PV & reliable product over time and a fast turnaround on their investments.

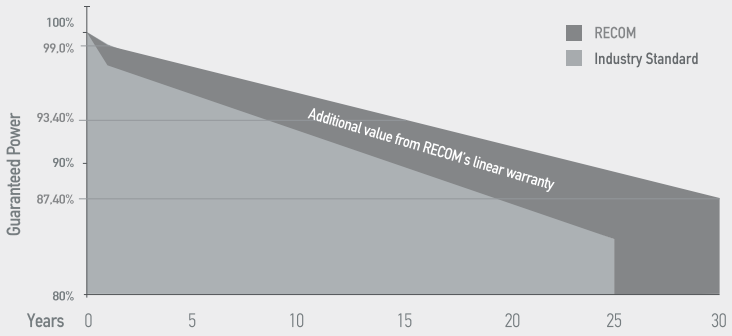

First Year Output	≥ 99.0%	2-30 Year Decline	≤ 0.40%	30 Year Output	≥ 87.40%

QUALITY PV & RELIABLE PRODUCT OVER TIME



Puma SERIES

SUPERIOR PERFORMANCE
& RELIABILITY

SHINGLED TECHNOLOGY

From 420Wp & up to 675Wp



25 YEARS PRODUCT WARRANTY

UP TO 30 YEARS TRANSFERABLE LINEAR POWER OUTPUT WARRANTY

Reduced Risk
Of Micro Cracks

ADVANTAGES OF PUMA SHINGLED MODULES

REDUCED RISK OF MICRO CRACKS
The replacement of soldered ribbons with a low temperature and flexible ECA decreases thermal stresses during the modules production and operation, decreasing the risk of micro cracks formation.

Mechanical stresses (e.g. snow load) are relieved by the flexible interconnection, improving the reliability in harsh environments (as reflected in the increased warranty provided).

HIGHER CELLS DENSITY AND IMPROVED AESTHETICS
The inactive area is considerably reduced, no ribbons and cells gaps on strings improving the efficiency and aesthetic in full black modules.

LOWER RESISTIVE LOSSES AND THERMAL COEFFICIENT
The resistive losses in strings are considerably decreased thanks to the lower current of shingles (1/6 or 1/7 of the original cell) and the lack of interconnection ribbons in strings, improving at the same time the performance at high temperatures.

Higher yield per surface area

Higher yield in hot climate

Pmax Low Pmax at-0,3% / ºC



Puma SERIES

KEY BENEFITS

- 25 Years Product Warranty
- 87,2% Performance Output Warranty After 25 Years
- Over 20Wp More Compared to Standard Modules
- Reduced Transportation Costs
- Reduced Risk Of Micro Cracks
- Module Efficiency up to 21,7%

PERFORMANCE AT HIGH TEMPERATURES

HIGHER OUTPUT IN HOT CLIMATE — **+0,9 %** — Specific yield (kWh/kWp) due to low temperature coefficient

MORE EFFICIENT SPACE UTILIZATION — **- 3,1 %** — Space required for 1MWp of PUMA modules

HIGHER GENERATION PER UNIT AREA — **+4,1 %** — PV plant yield /sq.m. in hot climate

PEAK POWER
Up to 675Wp

MODULE EFFICIENCY 21,7%

TEMPERATURE RATIO - 0,34 %/°C


SMALL SIZE FOR ROOF TOP INSTALLATION

The PUMA module with power class over 555Wp, efficiency up to 21,6% and 25 years product & up to 30 years output warranty is:

- Best “Value for money” choice
- Ideal for rooftop installations (in the same size of the rooftop, more power can be installed compared to standard modules)
- Low LCOE

FOR COMMERCIAL & UTILITY INSTALLATIONS

The PUMA module with power class up to 675Wp, efficiency up to 21,7% and 25 years product & output warranty.

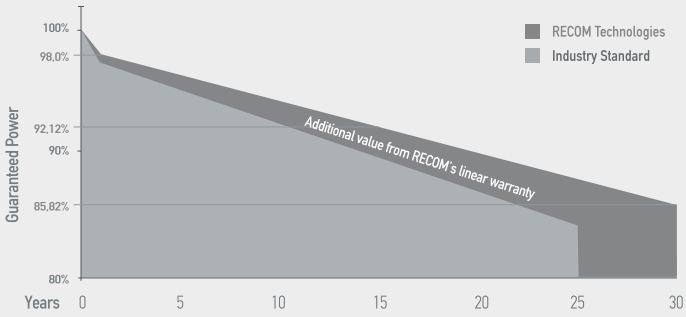

First Year Output	≥ 98.0%	2-30 Year Decline	≤ 0.42%	30 Year Output	≥ 85.82%

SEAMLESSLY INTEGRATES WITH THE ROOFTOP




Panther SERIES

FAST RETURN
ON YOUR INVESTMENTS

HALF-CUT TECHNOLOGY

From 360Wp & up to 670Wp

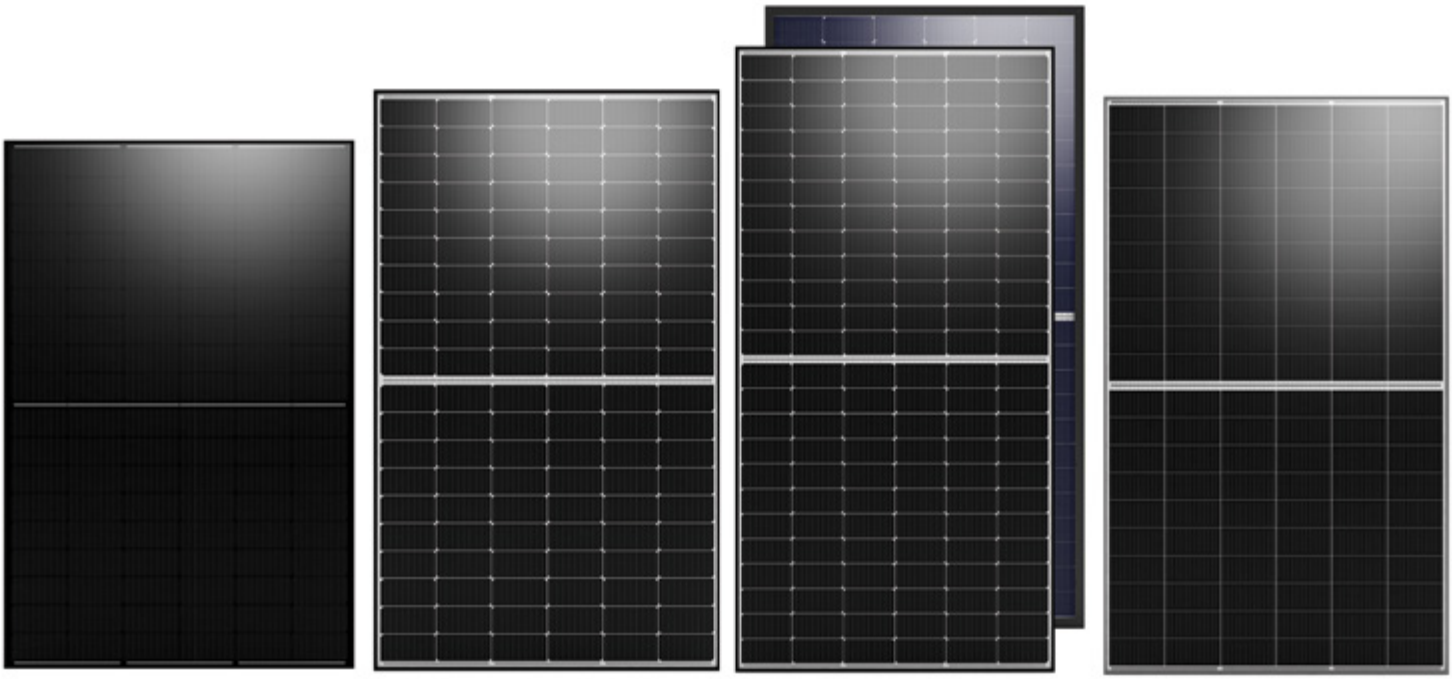

25 YEARS PRODUCT WARRANTY

Pmax

Low Pmax

ADVANTAGES OF PANTHER HALF-CUT MODULES

Groundbreaking technology; higher power output and improved system performance. The ideal solution for end users who want a fast turnaround on their investments. A fully certified premium quality and high efficiency module made with A grade materials.

Pmax Industry leading Low Pmax

Outstanding performance under extreme heat and low-intensity solar conditions

EL 100% electro-luminescence tested



Panther SERIES

KEY BENEFITS

- Higher Yield per Surface Area
- Higher Light Conversion
- Low LCOE
- Higher Yield in Hot Climate
- 25 Years Product Warranty
- Low Resistive Losses

PERFORMANCE AT HIGH TEMPERATURES


HIGHER OUTPUT IN HOT CLIMATE

MORE EFFICIENT SPACE UTILIZATION

HIGHER GENERATION PER UNIT AREA

Recom proposes PV modules size according to the customer requirements. Recom uses several cell sizes like:

- G1: 158.75mm
- M6: 166mm
- M10: 182mm
- G12: 210mm

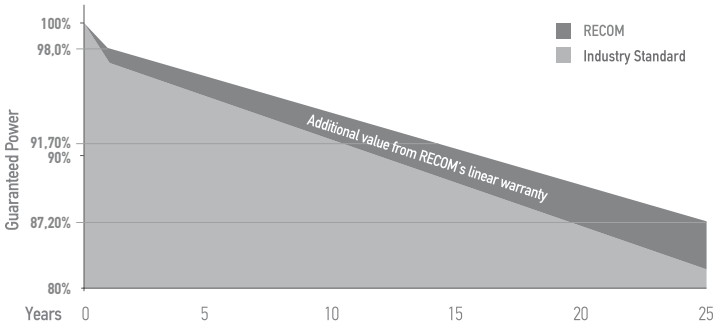

First Year Output	≥ 98%	2-25 Year Decline	≤ 0,45%	25 Year Output	≥ 87,20%

Great appearance

BLENDS PERFECTLY WITH THE ROOFTOP



Redefine Energy Solutions

INVERTERS - STORAGE ACCESSORIES

Intelligent energy management for
a resilient energy ecosystem.



HELIOS



Single MPPT
0.6 - 3.3 kW

APOLLO



Dual MPPT
2.5 - 6.0 kW

SINGLE PHASE SERIES

- Max efficiency 98% - IP66 protection
- Zero-export feed-in operation
- DC Input: 200% oversizing
- In-built global MPP scan for higher yields during shadowing conditions
- Quick and easy commissioning / configuration



ATLAS

Dual MPPT
3 - 15 kW

THREE PHASE SERIES

- Max efficiency 98,3% - IP66 protection
- Low startup voltage
- Ultrawide MPPT voltage range
- Support high power solar panels
- Built-in export power control



POSEIDON

17 - 30 kW



HERCULES

40 - 60 kW



ZEUS

275 kW

MULTI MPPT

- Max efficiency 99,03% - IP66 Protection
- 40A max input current per MPPT
- 12 MPPT trackers
- 2 strings per MPPT
- Supports high current bifacial PV modules with max PV current 20A



ZEUS

80 - 125 kW

MULTI MPPT

- Max efficiency over 98% - IP66 protection
- Low startup voltage
- Ultrawide MPPT voltage range
- Built-in export power control
- SPD type II protection (AC & DC)

INVERTERS

HYBRID SERIES



ORION

Dual MPPT
3.0 - 7.5 kW

SINGLE PHASE HYBRID SERIES

- Max efficiency 97,6%- IP65 protection
- Higher efficiency on charging and discharging up to 97.0%
- Switchover time <10ms
- Low start output voltage resulting to longer operation (higher yields) throughout the day
- On & Off-grid parallel function up to 15kW
- Zero-export feed-in operation



TITAN

Dual MPPT
5.0 - 15 kW

THREE PHASE HYBRID SERIES

- Max efficiency 98%- IP65 protection
- Higher efficiency on charging and discharging up to 98.5%
- Switchover time <10ms
- Less energy loss from battery to inverter
- Three-phase unbalanced output up to 50% nominal output power on single phase
- Zero-export feed-in operation

STORAGE



PANDORA

5.0 - 32.5 kWh &
7.2 - 46.8 kWh

- Stackable modules, easy and fast for single-person installation.
- Unique battery heating technology which enables efficient operation at low temperatures
- Soft start protecting batteries and inverters from a sudden surge
- IP65 for both indoor and outdoor installation

ACCESSORIES

DATA LOGGERS



Logger-Z
- Supports up to 32 devices
- Supports local & remote monitoring



Logger
- Local & Remote monitoring, setting and upgrade of batch inverters
- Support large-capacity data storage

MONITORING DEVICES



WiFi



LAN

WiFi Plus



4G

- Quick installation with "Plug & Play" function
- IP 65 dust prevention water proofing designs
- Stable data transmission and good reliability
- Data Transfer Interval 5 mins
- WiFi Plus
- Data Transfer Interval 10 sec

SOFTWARE (MONITORING)






- Quick and easy WIFI configuration
- Rich data analysis-Realtime/ Daily/Monthly/Yearly
- Check and control of the plant anytime, anywhere

Recharge EV Chargers

EV chargers are the catalysts of a transformative era, fueling a future where electric vehicles reign supreme, emissions are minimized, and sustainable mobility becomes a seamless reality.






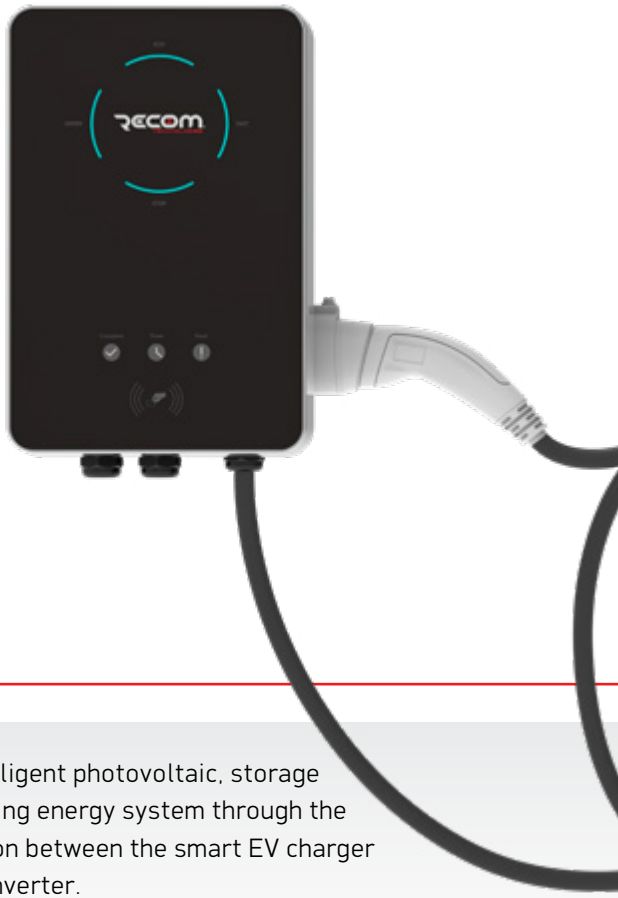

ADVANTAGES

- Plug or socket outlet selectable.
- Integrated current failure monitoring (30mA AC & 6mA DC)
- Integrated with PEN protection and no earth rod
- Encrypted communication based on TLS
- Indoor and outdoor easy installation
- Integrated RFID function
- Form an intelligent photovoltaic, storage and EV charging energy system through the communication between the smart EV charger and RECOM inverter.
- Remote setting and monitoring with APP and website
- Smart dynamic load balance control
- Set timers to reduce your cost during peak and valley price



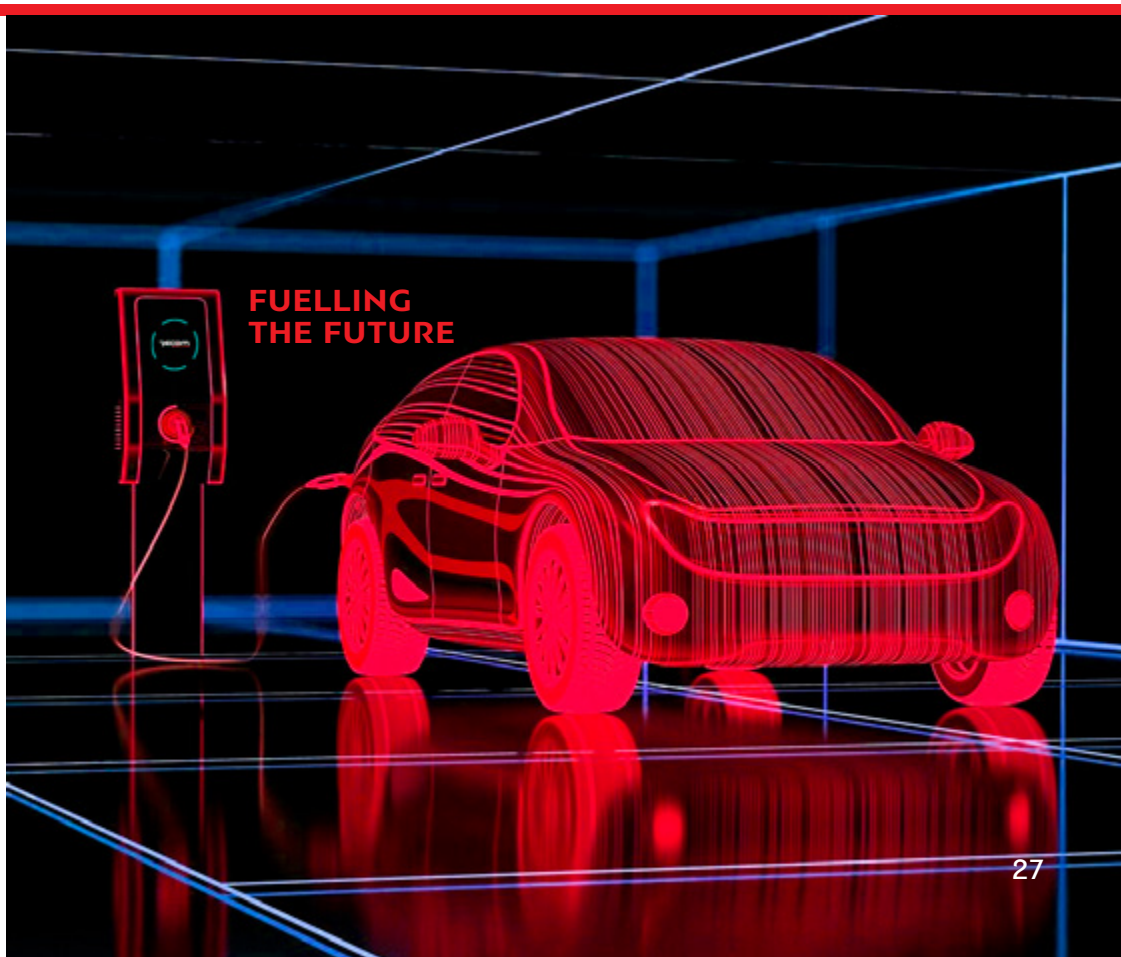



REPOWER THE WORLD

Driven by the vision of a sustainable future, at RECOM we support the transition of solar energy into a meaningful and integrated part of everyone's livelihood. Committed to our vision we actively contribute to the development of emerging energy solutions.

RECOM drives households and businesses to produce energy through solar and achieve energy independence towards a sustainable future.



EUROPEAN MANUFACTURER

SOLAR ASSOCIATION MEMBERSHIPS

ABSOLAR
Member

SolarPower Europe
Member

PROJECT REFERENCES

BALAMA MINE — MOZAMBIQUE



PAVEL BANYA — BULGARIA




BAVARIA — GERMANY



SCOTT AFB — A2 LANDFILL AUBURN, NY, USA



SPUNDŽĀNI LV — LATVIA

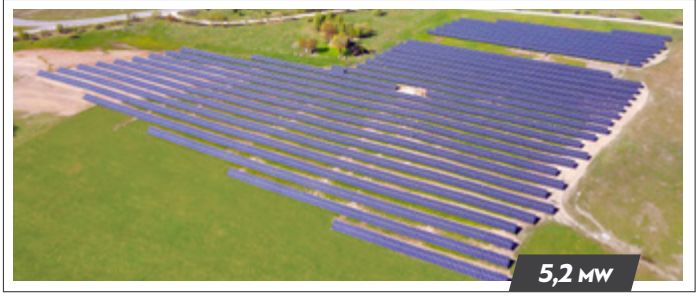

KINGS PARK — LONG ISLAND, NY UNITED STATES



ASHWATER — DEVON, UK



OLESHKY — UKRAINE



GAZIANTEP — TURKEY



CHELVESTON — UNITED KINGDOM



PROJECT REFERENCES

STEEL SUN — LACKAWANNA CITY, NY UNITED STATES



JŪRMALA — LATVIA



HOMERIDAE — OLEAN, NY UNITED STATES



BUZSAK — BUZSÁK, HUNGARY



KRAKOW AM SEE & GIELOW — GERMANY



COURTINE — FRANCE



ISRAEL — U.S AIRBASE



KAZANLAK — BULGARIA



GENEVA STADIUM — SWITZERLAND



CHAILAC — FRANCE





CYPRUS
1 Avlonos Street,
Nicosia, 1075
Cyprus
T: +357 22 008009
E: info@recom-tech.com

FRANCE
4 Avenue
Pierre Marzin
22300 Lannion, France
T: +33 0296058050
E: contact@recom-sillia.com

GERMANY
Königsallee 2B, 40212,
Düsseldorf, Germany
T: +49 211 30297156
E: info@recom-tech.com

GREECE
1 Poseidonos Str.
17342, Ag. Dimitrios
Athens, Greece
T: +30 2182189858
E: info@recom-tech.com

ITALY
Office: Foro Buonaparte 12,
Milano, Italy CAP 20121
Factory: Via dell' Artigianato,
San Pietro Viminario, Padova,
Italy CAP 35020
T: +39 0287362495
E: info@recom-tech.com

SINGAPORE
Level 39, Tower 2
Marina Bay Financial Centre
10 Marina Boulevard
018983 Singapore
T: +65 68186030
E: info@recom-tech.com

U.A.E.
Office 801, Twin Towers,
Baniyas Street, Dubai, United
Arab Emirates. P.O.Box 41423,
T: +971(4)2678443
E: info@recom-tech.ae

UK
3 & 5 Hospital Approach,
Chelmsford, Essex
CM1 7FA
T: +44 01245 440302
E: info@recom-tech.co.uk

USA
580 California Street,
12th & 16th Floors
San Francisco,
California, CA 94104
T: +1 (561) 388 1003
E: info@recom-tech.com

WWW.RECOM-TECH.COM